

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

IULIANETTI 1

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**


U.S. APPLICATION NO. (If known, see 37 CFR 1.55)

09/719745

INTERNATIONAL APPLICATION NO.
PCT/IT99/00330

INTERNATIONAL FILING DATE
19 October 1999

PRIORITY CLAIMED
15 April 1999



TITLE OF INVENTION

**FILM MADE OF HOLED PLASTIC MATERIAL THREE-DIMENTIONALLY SHAPED AND
RELATED MATRIX FOR ITS REALISATION**

APPLICANT(S) FOR DO/EO/US

Lino IULIANETTI

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ The US has been elected in a Demand by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is attached hereto (required only if not transmitted by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An Assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
14. ☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☒ Other items or information:
 - ☒ Courtesy copy of the International Application as filed.
 - ☒ Courtesy copy of the first page of the International Publication (WO 00/62729).
 - ☒ Courtesy copy of the International Preliminary Examination Report. There were no annexes
 - ☒ Formal drawings, 6 sheets, Figures 1-10.
 - ☒ Courtesy Copy of the International Search Report.
 - ☒ Applicant claims small entity status. See 37 CFR 1.27.

U.S. APPLICATION NO (if known, see 37 CFR 1.5) <div style="font-size: 1.5em; font-weight: bold; margin-top: 10px;">09/719745</div>	International Application No PCT/IT99/00330	Attorney's Docket No IULIANETTI 1
17. [X] The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a)(1)-(5): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... \$1000.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO..... \$860.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO..... \$710.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4)..... \$690.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4)..... \$100.00		CALCULATIONS PTO USE ONLY
ENTER APPROPRIATE BASIC FEE AMOUNT =		\$ 860.00
Surcharge of \$130.00 for furnishing the oath or declaration later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		\$
Claims as Originally Presented	Number Filed	Number Extra
Total Claims	6 - 20	Rate
Independent Claims	1 - 3	X \$18.00
Multiple Dependent Claims (if applicable)		X \$80.00
		+\$270.00
TOTAL OF ABOVE CALCULATIONS =		\$ 860.00
Claims After Post Filing Prel. Amend	Number Filed	Number Extra
Total Claims	- 20	Rate
Independent Claims	- 3	X \$18.00
		X \$78.00
TOTAL OF ABOVE CALCULATIONS =		\$
Reduction of 1/2 for filing by small entity, if applicable. Applicant claims small entity status. See 37 CFR 1.27.		\$ 430.00
SUBTOTAL =		\$ 430.00
Processing fee of \$130.00 for furnishing the English translation later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		\$
TOTAL NATIONAL FEE =		\$
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +		\$
TOTAL FEES ENCLOSED =		\$ 430.00
		Amount to be: refunded
		charged
a. [] A check in the amount of \$ _____ to cover the above fees is enclosed. b. [X] Credit Card Payment Form (PTO-2038), authorizing payment in the amount of \$ 430.00, is attached. c. [] Please charge my Deposit Account No. 02-4035 in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. d. [XX] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 02-4035 . A duplicate copy of this sheet is enclosed.		
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.		
SEND ALL CORRESPONDENCE TO: BROWDY AND NEIMARK, P.L.L.C. 624 NINTH STREET, N.W., SUITE 300 WASHINGTON, D.C. 20001 TEL: (202) 628-5197 FAX: (202) 737-3528 Date of this submission: December 15, 2000		
SIGNATURE Roger L. Browdy		NAME
25,618		REGISTRATION NUMBER

09/719745

JC01 Rec'd PCT/PTO 15 DEC 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)	Art Unit:
Lino IULIANETTI)	
)	
)	
IA No.: PCT/IT99/00330)	
)	Washington, D.C.
IA Filed: 19 October 1999)	
)	
U.S. App. No.:)	
(Not Yet Assigned))	December 15, 2000
)	
National Filing Date:)	
(Not Yet Received))	
)	
For: FILM MADE OF HOLED..)	Docket No.:
		IULIANETTI 1

PRELIMINARY AMENDMENT

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Contemporaneous with the filing of this case and
prior to calculation of the filing fee, kindly amend as
follows:

IN THE SPECIFICATION

After the title please insert the following
paragraph:

—The present application is the national stage
under 35 U.S.C. 371 of PCT/IT99/00330, filed 19 October
1999.—

09719745-1-1500

IN THE CLAIMS


Claim 3, line 1, delete "claims 1 and 2", and insert therefor --claim 1--.

REMARKS

The above amendment to the specification is being made to insert reference to the PCT application of which the present case is a U.S. national stage. The above amendment to the claim is being made in order to eliminate the properly multiply dependent claim, for the purpose of reducing the filing fee. Please enter this amendment prior to calculation of the filing fee in this case.

Favorable consideration and allowance are earnestly solicited.

Respectfully submitted,
BROWDY AND NEIMARK, P.L.L.C.
Attorneys for Applicant

By: 
Roger L. Browdy
Registration No. 25,618

RLB:wrđ
Telephone No.: (202) 628-5197
Facsimile No.: (202) 737-3528

DescriptionFilm Made of Holed Plastic Material Three-Dimensionally Shaped and Related
Matrix for its RealisationTechnical Field

The present invention relates to a film made of holed plastic material three-dimensionally shaped and a related matrix for its realisation. A film of this kind can be employed as a filtering layer in different sectors like that of hygienic-sanitary items, such as ladies' sanitary napkins, nappies for children and pads for incontinence protection. It can be used as a filtering layer or film for packing meats destined for consumption, allowing for their better preservation and longer duration. This film can also be used in agriculture for mulching or protecting crops on the soil or as a protective wrapping for fruit on the plant while they ripen. for instance grapes.

Below, as a foreword, are listed the definitions of some parameters used in the manufacture of holed plastic material.

The term "liquid strike-through time" indicates the time taken by a known quantity of known liquid to traverse a given filtering layer or film, and thus determines its ability to be traversed by that liquid. The measurement is performed following procedures in accordance with the current Edana 150.3 standard.

"Coverstock wetback" is the parameter that measures the ability of a filtering layer or film to oppose the back-flow of a known liquid in the direction of the skin as soon as it penetrates into the layer, and the measurement is performed following procedures in accordance with the current Edana 151.1 standard.

The term "gloss" refers to the ratio between the light specularly reflected by a surface, and total reflected light. Hence in defining the superficial gloss of a film, only the light reflected with an angle equal to the incidence angle is taken into consideration, and not light reflected in all other directions.

Background Art

For many years, after US Patent 3,929,135 by Procter & Gamble (1974), efforts have been mainly focused on making holed plastic material films as similar to tissues as possible, with fibre-like elements defining openings which in turn are divided into smaller openings or polygonal shapes with such holes as to confer the appearance of twisted fibres or obtaining small asperities on the surface of the films of plastic material in order to diminish their gloss.

Figure 1 shows an enlarged schematic view of a portion of a first film made of holed plastic material 100, known in the prior art. The film 100 is shaped as a meshed micro-structure obtained with segments 101, having cross section profile with nearly vertical lateral branches 102, and an upper branch 103 with substantially horizontal profile. The number 104 indicates the lower surface of the film 100. The segments 101 join in nodes 105 and delimit holes 106 with the shape of truncated cones with pentagonal plan form.

A film of this kind presents high "strike-through" and "wetback" values, which negatively influence its functionality, as well as high "gloss", which immediately reveals the nature of the material, i.e. plastic.

This prior art holed film 100, in order to reduce its superficial gloss and/or provide the rough appearance of a tissue, presents on the summit of the segments 101 or in other parts of the inner surface of the holes 106, micro-asperities or micro-projections arranged in a regular checkerboard manner, as shown in 107 in Figure 1, which, however, have the drawback of slowing the flow of the liquid, offering greater friction during its travel through the truncated cone itself. Moreover, these possible superficial projections force the fluid to remain deposited around them. The above drawbacks contribute, together with the high "wetback" value mentioned above, to the unpleasant wet sensation that results when the upper filtering layer of a baby nappy or an incontinence pad or ladies' sanitary napkin is not able to prevent liquids from returning in contact with the skin.

Figure 2 shows an enlarged schematic view of a second film of holed plastic material 200, known in the prior art. Unlike the matrix 100 of Figure 1, the film 200

has segments 201, having cross section profile with oblique lateral branches 202 terminating in the upper surface with a vertex 203. With this tapered configuration, "gloss" is actually reduced.

However, the goal - at times attained in an excellent manner - of making such films as similar to tissues as possible, feature that assumes particular importance if said films are to be employed for nappies and sanitary napkins, nonetheless fails to fulfil the principal purpose of these films, i.e., in the specific case of the hygienic-sanitary sector, of allowing a rapid absorption of body fluids, such as urine or menstrual liquid, from the surface of the skin. These liquids should be made to flow in the direction of an absorbing pad and they should be prevented from flowing back in the opposite direction, thereby avoiding an unpleasant wet sensation to the wearer of nappies or sanitary napkins.

Instead, especially in the case of the second film 200 of Figure 2, laboratory tests have shown that the presence of rectilinear segments in the cross section profile of the segments 201, which define conical projections, allows to provide said projections with an evident conicity, regular along the entire cross section. This cross section of regular conical shape may, however, compromise the "wetback" or the "strike-through" value, or even both. If said rectilinear segments are located in the upper part of the truncated cone of the hole or have a slight inclination with respect to the horizontal plane of the upper surface of the film, they define a truncated cone or hole that is excessively closed in the lower part. In this way the "strike-through" value is compromised, and it will be very high since the passage area of the terminal part of the truncated cone or bottom of the hole is very small. If said rectilinear segments are located in the descending lower part of the truncated cone or if they are excessively inclined, with respect to the horizontal plane of the upper surface of the film, as shown in Figure 2, they define a truncated cone with insufficiently converging walls. In this way the modest conicity of the truncated cone will cause a high "wetback" value, allowing the liquid that has just passed through to flow back in the opposite direction.

Disclosure of Invention

Therefore, in general, the aim of the present invention is to provide a film of the type in question with the property of letting liquids be absorbed rapidly, preventing their back flow in the opposite direction.

5 This and other aims beside are all reached by a film made of holed plastic material shaped three-dimensionally, having an upper surface that presents a multiplicity of opening extending in the form of through holes in the direction of a lower surface of the same film; mutually adjacent through holes being separated by segments of said film having a profile with symmetric sides, converging towards the
10 upper surface, which is characterised in that said profile of the film segments has a conic section as its cross section.

Advantageously, this conic section is a semi-ellipse.

This profile of the film segments gives rise to a particular three-dimensional shape of the holes, akin to a funnel, which confers to the film according to the
15 invention the property of attracting surface liquids and letting them pass rapidly only downwards, preventing them from flowing back in the opposite direction.

Unlike the known films or strips of three-dimensionally shaped holed plastic material, described above, the film according to the present invention has a very low value of "wetback", a low "strike-through" value, a low "gloss" value and a reduced
20 surface area in contact with the user.

The film according to the present invention can be obtained using any technique known in the prior art, wherein any thermoplastic film, for instance made of polyethylene and organic and/or inorganic additives or of any mixture of polyolefin and organic and/or inorganic additives, is wrapped on a forming matrix
25 holed or extruded at the nearly molten state directly, and otherwise, on said matrix and said film is holed for instance by means of a jet of high pressure cold or hot air or by means of a jet of high pressure cold or hot water, by means of the mechanical action of a punch or any body of any mechanical consistency of any material which partially or fully penetrates within the holes of said matrix making the film take on
30 the shape of said forming matrix.

In particular, a matrix is provided for the realisation of the film according to the invention made in the form of a thick mesh of mutually connected elements, with conical cross section, obtained with metal deposition in successive phases.

Further features and advantages of the present invention shall be more readily apparent from the detailed description that follows of a preferred embodiment, illustrated purely by way of non limiting indication in the enclosed drawings.

Description of the Drawings

- Figures 1 and 2 show enlarged schematic perspective views of prior art films of plastic materials;

- Figures 3 and 4 show enlarged schematic perspective views of a portion of a first embodiment of matrix and of a corresponding film of plastic material according to the present invention;

- Figure 5 shows a cross section view of a portion of the matrix of Figure 3 and a portion of the film of Figure 4 superimposed on the matrix;

- Figure 6 shows a schematic representation of the operation of the film of Figure 4;

- Figure 7 shows an enlarged perspective view of a portion of a second embodiment of film of plastic material according to the present invention;

- Figure 8 shows an enlarged schematic section of a portion of film of plastic material according to the present invention struck by light;

- Figures 9 and 10 show diagrams of the profiles of the "strike-through" and, respectively "wetback" parameters versus the pass-through area for a film according to the present invention.

Description of the Illustrative Embodiment

With reference to Figure 3, an embodiment is shown of a matrix 3 for realising a film constituting the subject of the present invention.

Such forming matrix may be obtained by electroplating of nickel of other metals, such as copper. It is defined by a thick mesh of elements 30 mutually connected according meshes with pentagonal plan form. Each element 30 has a

curved cross section having the profile of a conic section, in particular of a semi-ellipse with the lesser diameter by base according to its x-axis and with the greater semi-diameter of said semi-ellipse by height according to its y-axis.

With reference to Figure 4, a film 300 is shown of holed plastic material obtained with the matrix of Figure 3. Correspondingly thereto, the film 300 according to the present invention has a micro-structure formed by segments, generically indicated with the number 310, joined in nodes, indicated as 302, and delimiting micro-holes, indicated in general as 303. Each film segment 301 presents, in cross section, a profile in the shape of a semi-ellipse, having as its vertical semi-axis the greater semi-diameter of the ellipse and as its horizontal axis the lesser diameter of the ellipse itself. In the profile of each film segment, lateral branches 304, 305 and a vertex 306 are recognised.

With reference to Figure 5, a film 300 is shown formed on a matrix 3, whose elements 30 are schematically represented in cross section with various layers corresponding to an equal number of phases of the electroplating process. According to a particular metal electroplating technique, a nearly vertical growth of the element can be obtained up to a certain height, and then have progressively narrowing growth as the metal is deposited, until reaching the top with a very narrow, curved upper surface. In particular, and with reference to Figure 5, this technique consists of making a first deposition to form a support base 4; with the second deposition, the second layer 5 is obtained which confers to the matrix the proper mechanical properties such as strength and tenacity. Lastly, with the third deposition an outer superficial layer 6 is obtained to create a more porous surface coating than the other layers, able to facilitate the detachment of the film after the holing phase and able to provide it with an adequate degree of surface roughness ranging from 0.1 to 6.3 μ (preferably between 0.8 and 3.2 μ).

The matrix 3 can also be made in more than three phases with intermediate stages having different porosity or with different metals or even in fewer than three phases for simpler, more economical applications, even using a single metal.

Other construction techniques can be used to obtain such matrices, having

elements with curved cross section with the profile of a conic section, although such techniques are much more costly for this purpose, such as electron discharge machining, photoengraving or any laser technique, the removal of material by means of any mechanical machining process such as punching and etching or the superposition of concentric tubular sheets previously holed with any one of said technique.

This particular shape of the matrix elements allows to describe in the matrix three-dimensional openings with a shape akin to a funnel, shown in Figure 6, rather than a shape akin to a truncated cone, as was the usual case in the prior art. With reference again to Figure 6, the funnel shape, unlike the truncated cone shape, allows to have a dual conicity, i.e. two superposed truncated cones, such as to confer to the hole in the segment defined by the height H1 a mouth D2 wider than D1 and in the segment defined by the height H1 a lower truncated cone that is greater height but less pronounced conicity. The particular shape of the matrix elements, with the cross section in the shape of a semi-ellipse with its base equal to the lesser diameter and its height equal to half of the greater diameter of said semi-ellipse, confers to the film 300 segments or projections with a profile, as shown in Figure 5, which has a wide opening D3 to take in more liquid.

Furthermore, the film 300 presents better radiused walls with no sharp edges between the segment defined by the height H1 and the segment defined by the height H2, thereby facilitating the outflow of the liquid without its being minimally influenced along the entire section of the projection and, moreover, a lower truncated cone able to hinder the liquid that attempts to flow back in the opposite direction, i.e. from the lower surface of the film towards the upper one.

Figure 7 shows a second embodiment of the film, indicated as 400, wherein the disposition of the film segments, indicated generically as 401, joining into nodes 402 and delimiting holes 403, is fan-like.

The shape of the profile of the segments 401 is identical to that of the segments 301 of Figure 4. This profile of the present invention defines a summit (the vertex 304, 406 of the semi-ellipse) narrowing in correspondence with the upper surface of

the film, in order to define a wider opening, and a base of such a shape as to define a segment or projection with a higher truncated cone, starting from the lower surface of the film in the direction of the upper one, with the purpose of offering a greater resistance to the fluid that attempts to flow back upwards. Moreover, the contact surface on the upper part of the film defined by the film segments is reduced and akin, in theory, to a point. This characteristic thus allows to avoid residual deposits of liquid between the upper surface of the segment 301, 401 and the surface from which the liquid is to be absorbed, preventing the unpleasant sensation of wetness. The liquid just deposited on the upper surface of the film of the present invention easily flows downward due to the curved summit of the segments 301, 401 so that it can slide either to one side or to the other of said segments. The absence of any superficial micro-projections, generally present in the films of the prior art in order to reduce their gloss and/or confer a fibre-like appearance, facilitates this down flow.

The film according to the present invention has very narrow reflecting surfaces. With reference to Figure 8, the film segment, not having rectilinear branches in the profile of its cross section and in particular on the upper surface of the film itself, offers surfaces which in theory are only point-like to incident light. This allows to obtain low values of "gloss" without having to subject the film to additional work processes, such as embossing. Considering a light beam generated by a known source positioned at a known distance which reaches the segments with an angle of incidence for instance of 45° , it can be noted that all rays which reach the upper surface A, corresponding to the upper surface of the film, nearly flat in the segment, is reflected in the direction of the receiving lens positioned at a known distance. In the case of the film according to the present invention, with the segments having a cross section of semi-elliptical shape, one can note that only a minimum portion is reflected in the direction of the receiving lens. Since the film segment has the curved shape of a semi-ellipse, the incident rays are reflected according to the tangent of each point of said curve, so that in Figure 8 it can be observed that only the central ray is reflected according to the tangent to the point on the summit of the bridge corresponding to the upper surface A of the film. The other rays have a different

reflection because they have a different angle of incidence from the point of tangency, for instance of tangent B with an angle of incidence of 66° , so that, being reflected with the same angle, they are not perceived by the receiving lens. A ray with a different angle of incidence, for instance of tangent C with an angle of 9° , being reflected with the same 9° angle, is also not perceived by the receiving lens.

The graphs of Figures 9 and 10 show the relationship existing between "wetback" and passage area, and between "strike-through" and passage area respectively, using the film of the present invention. While the value of "wetback" has nearly regular growth as the passage area increases, the value of "strike-through" decreases regularly as the passage area increases until reaching a value of about 27%, measured at the base of the projections or film segments. The graph in Figure 9 shows that it is not necessary to increase this value any further since the value of "strike-through" remains nearly constant. This is explained because up to that value the flow of the liquid through the projections is influenced by its own surface tension and viscosity, whereas beyond that value surface tension and viscosity no longer have any influence or in any case their influence is not sufficient to slow the flow in a noticeable manner. Assuming a value of the passage area equal about 27% to be the limit beyond which it is not advantageous to proceed for the aforesaid reasons, it can be observed that it corresponds to a "strike-through" value of about 1.5 sec.

With reference to the graph in Figure 10, to a passage area of 27% corresponds a "wetback" value of about 0.02 g. Hence, it can be stated that to the value of 27% for the passage area corresponds the best trade-off between the "wetback" and the "strike-through" values. The values reported above are in any case better than those measured in prior art films, and all trade-offs between "wetback" and "strike-through" ranging between 20 and 33% of the passage area are in any case better. This is possible thanks to the particular funnel-like shape of the film segments that have a cross section in the shape of a semi-ellipse. This shape hinders the upward back flow, opposing the liquid with a longer channel to be overcome. In the case of prior art films made of holed plastic material, instead, if the liquid flows beyond the hole at the base of the film segments, it finds less and less resistance as it flows upward,

so that once it has flowed through, it is easier for the liquid to move upward than downward.

The advantages of the film of holed plastic material of the present invention, produced with matrices having a mesh of elements with curved cross section profile in the shape of a semi-ellipse can be summarised as follows:

- 1- very low wetback value
- 2- low strike-through value
- 3- low gloss value
- 4- reduced surface in contact with the user.

In conclusion the matrices with the elements defined by the present invention allow to obtain films made of holed plastic materials with better performance than those existing in the prior art or in commerce.

Laboratory Tests

Some laboratory tests are now briefly illustrated to demonstrate the advantages of the film made of holed plastic material constituting the present invention.

The "liquid strike-through time" test consists of weighing 5 superposed ERT.FF3.W/S absorbing papers with a loading factor of 3.3, by Hollingsworth & Vose Company Ltd., stored for at least 24 hours at a humidity of $65\% \pm 2$ and a temperature of $20^\circ \pm 2^\circ \text{C}$. The papers used for this test were subsequently used also for the wetback test. A square piece of filtering film to be tested (in our case the film of the present invention or others like it) is cut with its side measuring 125 mm and it is positioned on the upper surface of the layer of five superposed absorbing papers just weighed (in our case the holed film must have projections or segments oriented towards the absorbing papers and in contact therewith). The packet thus obtained, comprising the five absorbing papers and the filtering film, is positioned at the base of an instrument called "lister", able to meter a known quantity (5 ml) of known liquid and to measure the time taken by said liquid to flow through the filtering film being examined. The instrument used for the test is a "lister" made by Lenzing AG.

The "liquid strike-through time" test is immediately followed by the "coverstock wetback" test. The value of the weight of the five absorbing papers,

previously weighed, is multiplied times the loading factor. The result of this product yields the maximum quantity of liquid that can be absorbed by said five absorbing papers in order to reach saturation. Through the "lister", used for the "liquid strike-through time" test, a further quantity of the same liquid is metered on the packet comprising the five absorbing papers and the piece of filtering film, equal to the difference between the result of the aforesaid product and the quantity of liquid previously metered in said test (5 ml). After effecting this additional metering the base contained in the "lister", together with said packet of layers of absorbing papers and filtering film, is moved into the nearby "wetback" instrument for the test by the same name, which consists of laying a known 4 kg weight on the upper surface of the filtering layer of said packet for a known time of 3 minutes with the purpose of uniformly wetting the upper surface of said filtering film. During this time, two ERT.FF3.W/S absorbing papers by Hollingsworth & Vose Company Ltd., stored for at least 24 hours at a humidity of $65\% \pm 2$ and a temperature of $20^\circ \pm 2^\circ \text{C}$, are weighed. Once this interval has elapsed, the weight is automatically lifted and the two papers just weighed are placed on the upper surface of the same filtering film. Then the same weight is descended again for an interval of 2 minutes. Upon expiration of this interval, the two papers are weighed again. The difference between this value after the test and that prior to the test yields the weight of the liquid that has egressed from the filtering layer. The instrument used for the test is a "wetback" manufactured by Lenzing AG. The liquids used for said tests are of two kinds:

simulated urine, prepared in the laboratory by diluting 18 g. of sodium chlorine in 2 litres of distilled water in accordance with Edana 150.3. with a surface tension of $70 \pm 2 \text{ nM/m}$ and a viscosity of 1.0 cPs at 20°C ;

plasmion solution, produced by Bellon in April of 1997 and expiring in April 2000, Batch no. 2018-3, with a surface tension of $63 \pm 2 \text{ nM/m}$ and a viscosity of 1.6 cPs at 20°C .

The gloss tests that followed were in accordance with ASTM standards D2447 and C346 and were conducted with a micro-gloss reflectometer manufactured by BYK-Gardner GmbH.

Claims

1. Film made of holed plastic material three-dimensionally shaped, having an upper surface presenting a multiplicity of opening extending in the form of through holes in the direction of a lower surface of the same film; mutually adjacent through holes being separated by segments of said film having a profile with symmetrical sides converging towards the upper surface, characterised in that said profile of the film segments has a conic section as a cross section.
2. Film made of holed plastic material according to claim 1, characterised in that said profile of the film segments has as a cross-section a semi-ellipse with lesser axis equal to the lesser diameter and lying on the lower surface of the film itself and with the vertex, relating to the greater axis, on the upper surface of the film itself.
3. Matrix for the realisation of the film according to claims 1 and 2, characterised in that said matrix is realised in the form of a thick mesh of mutually connected elements, with conic cross section, obtained with the deposition of metal in successive phases.
4. Matrix for the realisation of the film according to claim 3, characterised in that each matrix element is realised with three layers, corresponding to an equal number of phases.
5. Matrix for the realisation of the film according to claim 4, characterised in that said three layers of matrix element are made of different metals.
6. Matrix for the realisation of the film according to claim 4, characterised in that said three layers of matrix element are made of the same metal.

ABSTRACT

The present invention relates to a film made of holed plastic material three-dimensionally shaped, having an upper surface presenting a multiplicity of opening extending in the form of through holes (303) in the direction of a lower surface of the same film; mutually adjacent through holes (303) being separated by segments (301) of film having a profile in the shape of a conic section as a cross section with symmetric sides (304,305) converging towards the upper surface.

09719745-121500






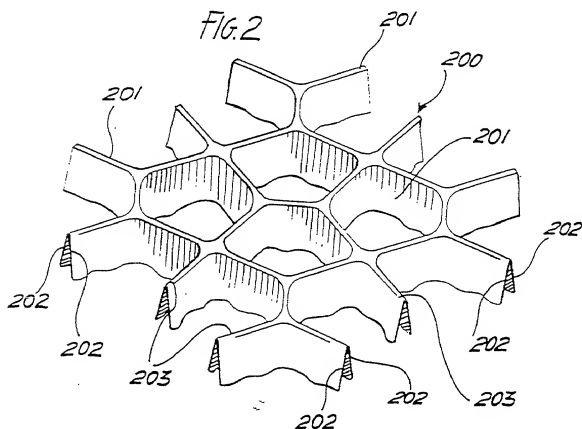


FIG. 3

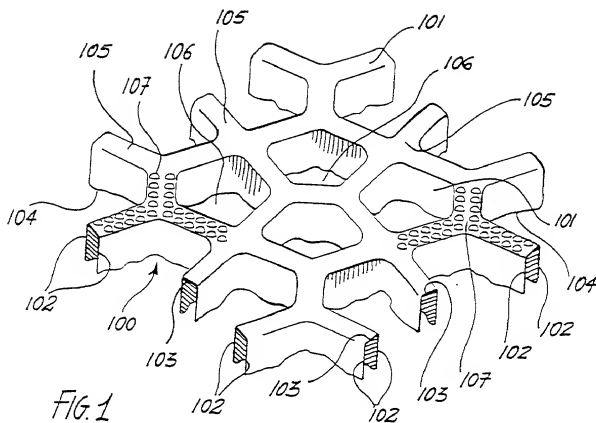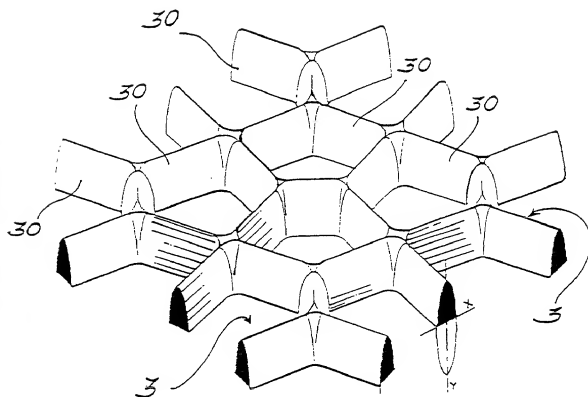
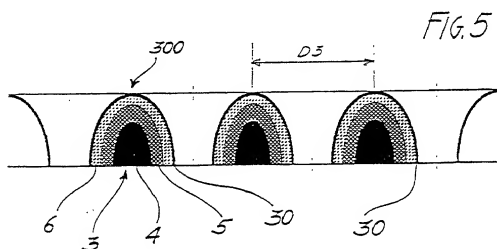



09719745.121500

3/6

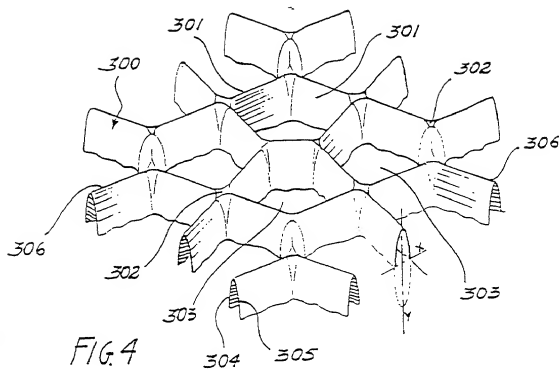

005121 54261760 08719745 121500

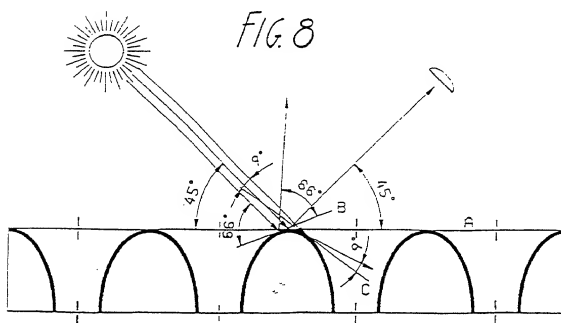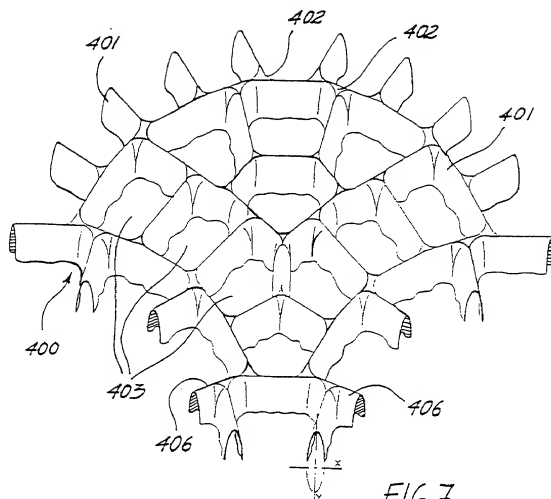

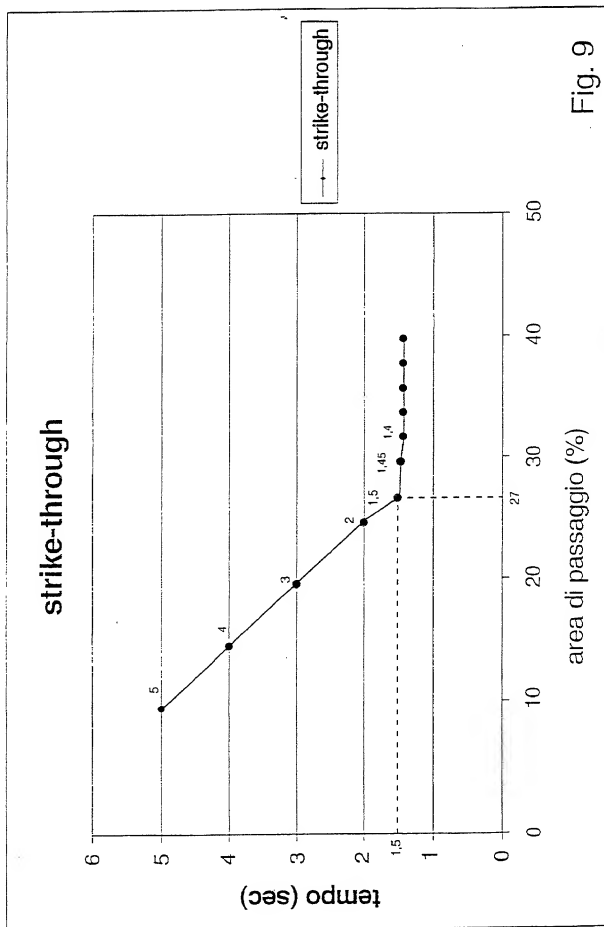

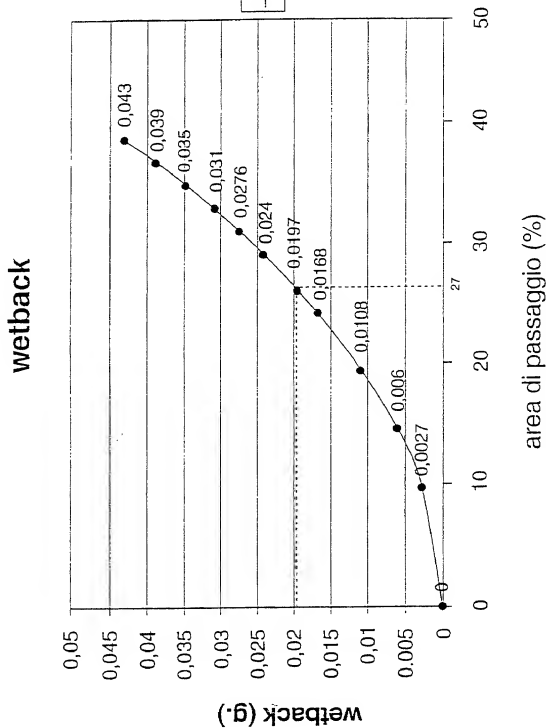


Fig. 10

Combined Declaration for Patent Application and Power of Attorney

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **FILM MADE OF HOLED PLASTIC MATERIAL THREE-DIMENSIONALLY SHAPED AND RELATED MATRIX FOR ITS REALISATION.**

the specification of which (check one)

[] is attached hereto;
 [] was filed in the United States under 35 U.S.C. §111 on _____, as
 U.S. Appl. No. _____*; or
 [X] ~~was~~ will be filed in the U.S. under 35 U.S.C. §371 by entry into the U.S. national stage of an international
 (PCT) application, PCT/IT99/00330 filed **19 October 1999** entry requested on _____*;
 national stage application received U.S. Appl. No. _____*; §371/§102(e) date _____*
 (* if known)

and was amended on _____ (if applicable).

(include dates of amendments under PCT Art 19 and 34 if PCT)

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and I acknowledge the duty to disclose to the Patent and Trademark Office (PTO) all information known by me to be material to patentability as defined in 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §§ 119 and 365 of any prior foreign application(s) for patent or inventor's certificate, or prior PCT application(s) designating a country other than the U.S., listed below with the "Yes" box checked and have also identified below any such application having a filing date before that of the application on which priority is claimed:

<u>RM 99A000229</u>	<u>ITALY</u>	<u>15 April 1999</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day Month Year Filed)	YES	NO
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day Month Year Filed)	YES	NO

I hereby claim the benefit under 35 U.S.C. §120 of any prior U.S. non-provisional application(s) or prior PCT application(s) designating the U.S. listed below, or under §119(e) of any prior U.S. provisional applications listed below, and, insofar as the subject matter of each of the claims of this application is not disclosed in such U.S. or PCT application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the PTO all information as defined in 37 C.F.R. §1.56(a) which occurred between the filing date of the prior application and the national filing date of this application:

_____ (Application No.)	_____ (Day Month Year Filed)	_____ (Status: patented, pending, abandoned)
_____ (Application No.)	_____ (Day Month Year Filed)	_____ (Status: patented, pending, abandoned)
_____ (Application No.)	_____ (Day Month Year Filed)	_____ (Status: patented, pending, abandoned)

As a named inventor, I hereby appoint the following registered practioners to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

All of the practioners associated with Customer Number 001444

Direct all correspondence to the address associated with Customer Number 001444; i.e., _____

BROWDY AND NEIMARK, P.L.L.C.
 624 Ninth Street, N.W.
 Washington, D.C. 20001-5303
 (202) 628-5197


The undersigned hereby authorizes the U.S. Attorneys or Agents appointed herein to accept and follow instructions from _____ as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. Attorneys or Agents and the undersigned. In the event of a change of the persons from whom instructions may be taken, the U.S. Attorneys or Agents appointed herein will be so notified by the undersigned.

Title: _____

U.S. Application filed _____, Serial No. _____

PCT Application filed _____, Serial No. _____

I hereby further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST INVENTOR Lino IULIANETTI	INVENTOR'S SIGNATURE 	DATE DEC.04,2000
RESIDENT Via S. Clemente, 50, ^{ITX} TORRE DEI PASSERI (PE) - ITALY		CITIZENSHIP Swiss Italian
POST OFFICE ADDRESS		
FULL NAME OF SECOND JOINT INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENT		CITIZENSHIP
POST OFFICE ADDRESS		
FULL NAME OF THIRD JOINT INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENT		CITIZENSHIP
POST OFFICE ADDRESS		
FULL NAME OF FOURTH JOINT INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENT		CITIZENSHIP
POST OFFICE ADDRESS		
FULL NAME OF FIFTH JOINT INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENT		CITIZENSHIP
POST OFFICE ADDRESS		
FULL NAME OF SIXTH JOINT INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENT		CITIZENSHIP
POST OFFICE ADDRESS		
FULL NAME OF SEVENTH JOINT INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENT		CITIZENSHIP
POST OFFICE ADDRESS		

ALL INVENTORS MUST REVIEW APPLICATION AND DECLARATION BEFORE SIGNING. ALL ALTERATIONS MUST BE INITIALED AND DATED BY ALL INVENTORS PRIOR TO EXECUTION. NO ALTERATIONS CAN BE MADE AFTER THE DECLARATION IS SIGNED. ALL PAGES OF DECLARATION MUST BE SEEN BY ALL INVENTORS.